


I**TRECCIATRICI PER MATERIALI FINO A 20 MM.**

Si tratta di macchine derivate dai modelli indicati tra parentesi, dei quali mantengono le caratteristiche generali di funzionamento.


Dotate di un doppio trasporto in uscita e di teste con passaggi del materiale maggiorati, permettono la lavorazione di materiali morbidi (ad esempio tubolari) fino a 20 mm. di larghezza.

**TRECCIATRICE A 3 CAPI (TRE 103)**

mm.	3	5	7	10	14	20
produz. m/h	70	110	150	190	240	320

**TRECCIATRICE A 4 CAPI (TRE 104)**

mm.	3	5	7	10	14	20
produz. m/h	40	60	80	120	150	200

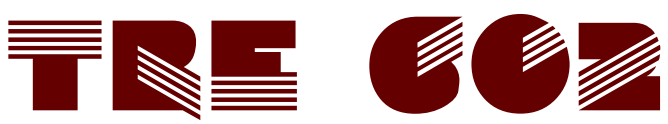
**TRECCIATRICE A 2 CAPI (TRE 502)**

mm.	3	5	7	10	14	20
produz. m/h	115	150	185	240	300	400



GB **PLAITING MACHINES FOR MATERIALS UNTIL 20 MM.**

They are machines with the general working features that are the same of the models shown bracketing.
 They have a double haulage plant on the outlet, and heads with larger material's passage.
 This permits the working of soft materials (like tubulars) up to 20 mm. width.

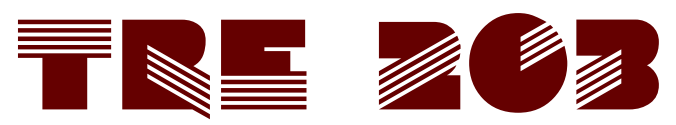


3 STRIPS PLAITING MACHINE (TRE 103)

mm.	3	5	7	10	14	20
output m/h	70	110	150	190	240	320



4 STRIPS PLAITING MACHINE (TRE 104)

mm.	3	5	7	10	14	20
output m/h	40	60	80	120	150	200

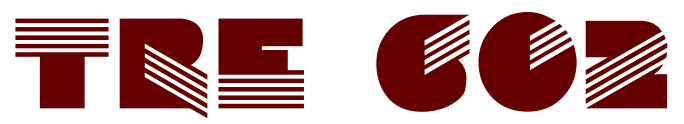

2 STRIPS PLAITING MACHINE (TRE 502)

mm.	3	5	7	10	14	20
output m/h	115	150	185	240	300	400